



HONOR HM4 CQC SERIES

BY LUCID AIRSOFT

INSTRUCTION MANUAL



TABLE OF CONTENTS

1	Safety and Handling	Pg. 1
2	Battery	Pg. 2
3	Loading and Magazine Removal	Pg. 2
4	Hop-up	Pg. 3
5	Safety	Pg. 3
6	Stock	Pg. 3
7	Important Notes	Pg. 3



ALWAYS READ MANUAL
CAREFULLY BEFORE
OPERATION.



PARENTAL GUIDANCE IS
RECOMMENDED FOR USERS
UNDER THE AGE OF 18




CARELESS SHOOTING MAY
CAUSE EYE DAMAGE.




LUCID
AIRSOFT


1

SAFETY AND HANDLING


 Always read through this manual before operation

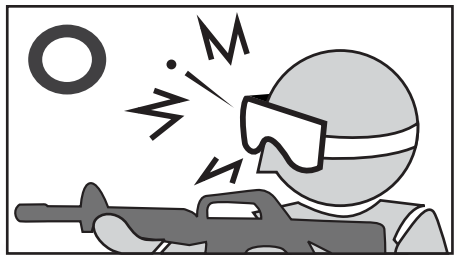

Make sure to wear eye protection.

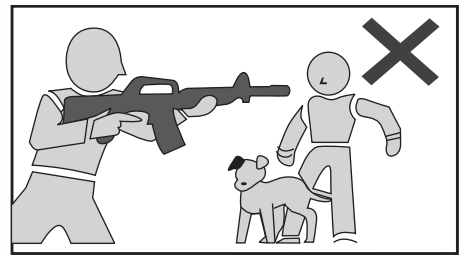


Don't train on people or animals.

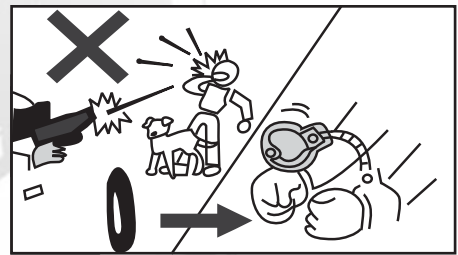


Don't shoot mischievously.




Don't look close to the muzzle.

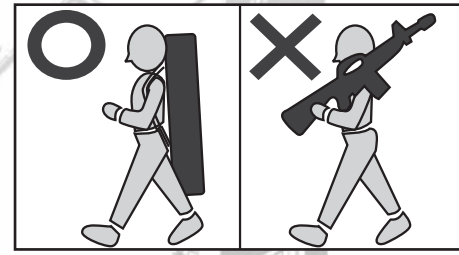


Use a bag or box when transporting.

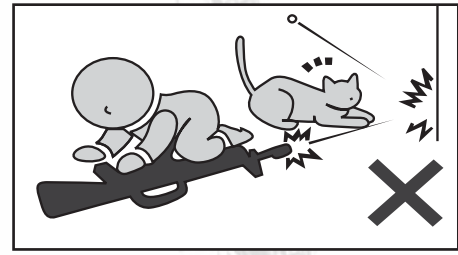


Keep out of the reach of children.

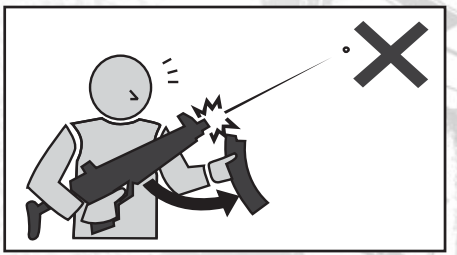


Gun may still fire with magazine removed.

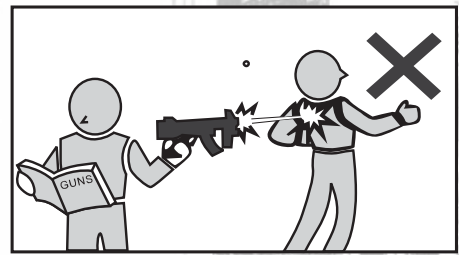


Never shoot casually.

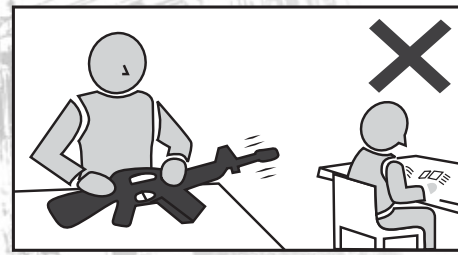


Practice safe muzzle control at all times.

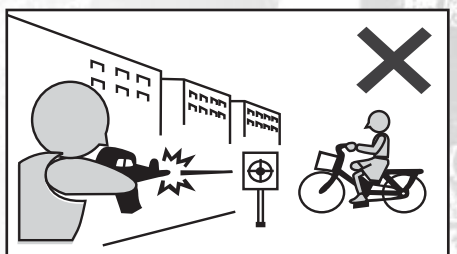

Don't shoot where there is people or transportation.

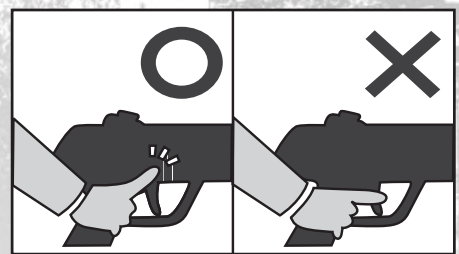

Keep finger off the trigger until you're ready to shoot a target.

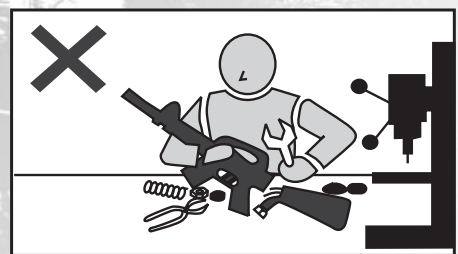

Do not dismantle or attempt repairs yourself.

2

BATTERY



SLIDE STOCK BUTT PAD IN A DOWNWARDS MOTION TO REVEAL BATTERY COMPARTMENT.



ATTACH WIRE CONNECTORS. SLIDE BATTERY INTO FOAM SPACER AND PUSH BATTERY INTO STOCK.



PUSH BATTERY AND WIRES INTO STOCK UNTIL FULLY SEATED. DO NOT USE EXCESSIVE FORCE. REINSTALL BUTT PAD.

3

LOADING AND MAGAZINE REMOVAL



PRESS THE RELEASE BUTTON TO REMOVE MAGAZINE. SUPPORT MAGAZINE WITH HAND TO PREVENT IT FROM DROPPING



LOAD MAGAZINE WITH 6MM BBs FROM THE HATCH LOCATED AT THE TOP OF THE MAGAZINE. CLOSE HATCH WHEN FINISHED.




SET THE MAGAZINE IN AN UPWARD MOTION. A CLICK SOUND WILL BE HEARD WHEN THE MAGAZINE IS PROPERLY CONNECTED.



WIND THE BOTTOM OF MAGAZINE IN A CLOCKWISE MOTION UNTIL TIGHT.

4 HOP-UP

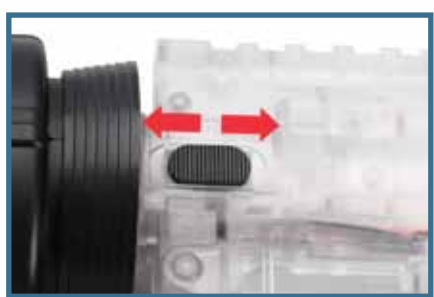

SLIDE HOP-UP ADJUSTMENT FORWARD TO DECREASE HOP AND SLIDE BACK TO INCREASE.

5 SAFETY



SET THE FIRING SELECTOR TO POSITION 1 FOR SAFE, POSITION 2 FOR SEMI-AUTO, AND POSITION 3 FOR FULL-AUTO.

6 STOCK



ADJUST STOCK TO DESIRED POSITION BY PRESSING THE STOCK RELEASE BUTTON AND MOVING THE STOCK FORWARD OR BACK.

7 Important Notes

